

ARENDA[®] | 1528

SERIES 8

H A N D B O O K





*From Norway
With Love*

THE STORY OF ARENDAL

1528 SERIES

PREMIUM BUILD QUALITY

HOW TO CONNECT

PLACEMENT & SETUP

SAFETY INSTRUCTIONS

WARRANTY

FOR UNBOXING
INSTRUCTIONS
SCAN QR:





ARENDAAL[®]

1528

SERIES

8

THE STORY OF ARENDAL AND THE 1528 SERIES

A Legacy of Excellence

In the charming town of Arendal, nestled along the southern coast of Norway, history and innovation intertwine to create something truly extraordinary. The year 1528 marked a significant chapter in Arendal's storied past, a time when the town's name first appeared in toll papers linked to the booming timber trade. This trade, driven by the rich forests of Norway, would lay the foundation for a legacy of craftsmanship and excellence that endures to this day.





A Journey Through Time: Arendal in 1528

In the early days of shipping, the southern part of Norway was a sought-after location for its abundant trees. Ships from Scandinavia and Northern Europe, particularly the Dutch, flocked to this region, drawn by the promise of high-quality timber. These international shippers, seizing the opportunity, cut down trees along the coastline, often taking them back for production without paying a dime—a practice that did not go unnoticed by the Norwegian crown.

The depletion of easily accessible timber close to the shore forced a significant change. To protect this valuable resource, the King of Norway imposed supervision and fees on tree-cutting activities. As the timber supply near the coast dwindled, the loggers ventured further inland along the fjords, giving rise to the profession of log rafting. This new trade required a natural harbor where timber could be stored and managed—a role perfectly suited to Arendal.

Arendal's natural harbor became a bustling hub, a place where timber was gathered, controlled, and eventually shipped to eager customers across Europe. The city's name, "Arendell," first appeared in documents from 1528, marking its importance in the timber trade and setting the stage for a legacy of excellence.

The Birth of the 1528 Series: A Revolution in Audio

Fast forward to the present day, and Arendal Sound proudly continues this tradition of excellence with the launch of the 1528 Series—a line of high-end speakers that embody the spirit of Arendal’s rich history. Much like the timber trade that once defined the city, the 1528 Series is our commitment to putting Arendal on the map once again. Drawing inspiration from the superior quality of the timber that was vital in 1528, we’ve crafted the 1528 Series to set new standards in audio excellence. This series represents a dedication to quality, innovation, and the pursuit of perfection, ensuring that Arendal Sound stands out in the world of high-end audio just as Arendal did in the world of timber trade.

The 1528 Series is not just a product; it is a movement. A movement against overpriced products delivering exceptional experience for you.

Each speaker in this series is meticulously crafted with bespoke parts designed in-house by our engineering team. From the complex curved front baffle that ensures perfect time alignment of all drivers to the listener, to the new unique 3-way design that offers superior dispersion and a wider listening window, every detail is engineered to deliver the best possible sound.

Our custom-designed Aluminum bass drivers with inverted surrounds provide high output with low distortion, while the Carbon-Graphene midrange driver offers market-leading performance. The Lithium-Magnesium tweeter, likely never before used in home audio, brings unparalleled detail, dynamics, and resolution. These innovations make the 1528 Series a revolution in the high-end audio industry.

Designed for You: The Customer at the Heart of Innovation

At Arendal Sound, we believe that true innovation is driven by the needs and desires of our customers. The 1528 Series is a testament to this belief. We listened to your feedback and crafted a product that combines affordability with high-end quality, challenging the overpriced norms of the industry.


Our speakers are not just about delivering exceptional sound—they are about enhancing your life. Imagine hosting a movie night with friends or family, and feeling the deep, powerful bass reverberate through your living room, or listening to your favorite music and hearing every detail with crystal clarity. The 1528 Series is designed to integrate seamlessly into modern homes, with a high-end finish and bespoke color options that add a touch of elegance to any space.

Evoking Emotions: The Power of Sound

Sound has the power to evoke emotions, to transport you to another time and place, and to create unforgettable memories. With the 1528 Series, we aim to elevate your listening experience, bringing you closer to the music and movies you love. Our customers have shared their excitement about our previous products, and we anticipate even greater reactions with the 1528 Series.



Jan Ove Lassen
Founder of Arendal Sound

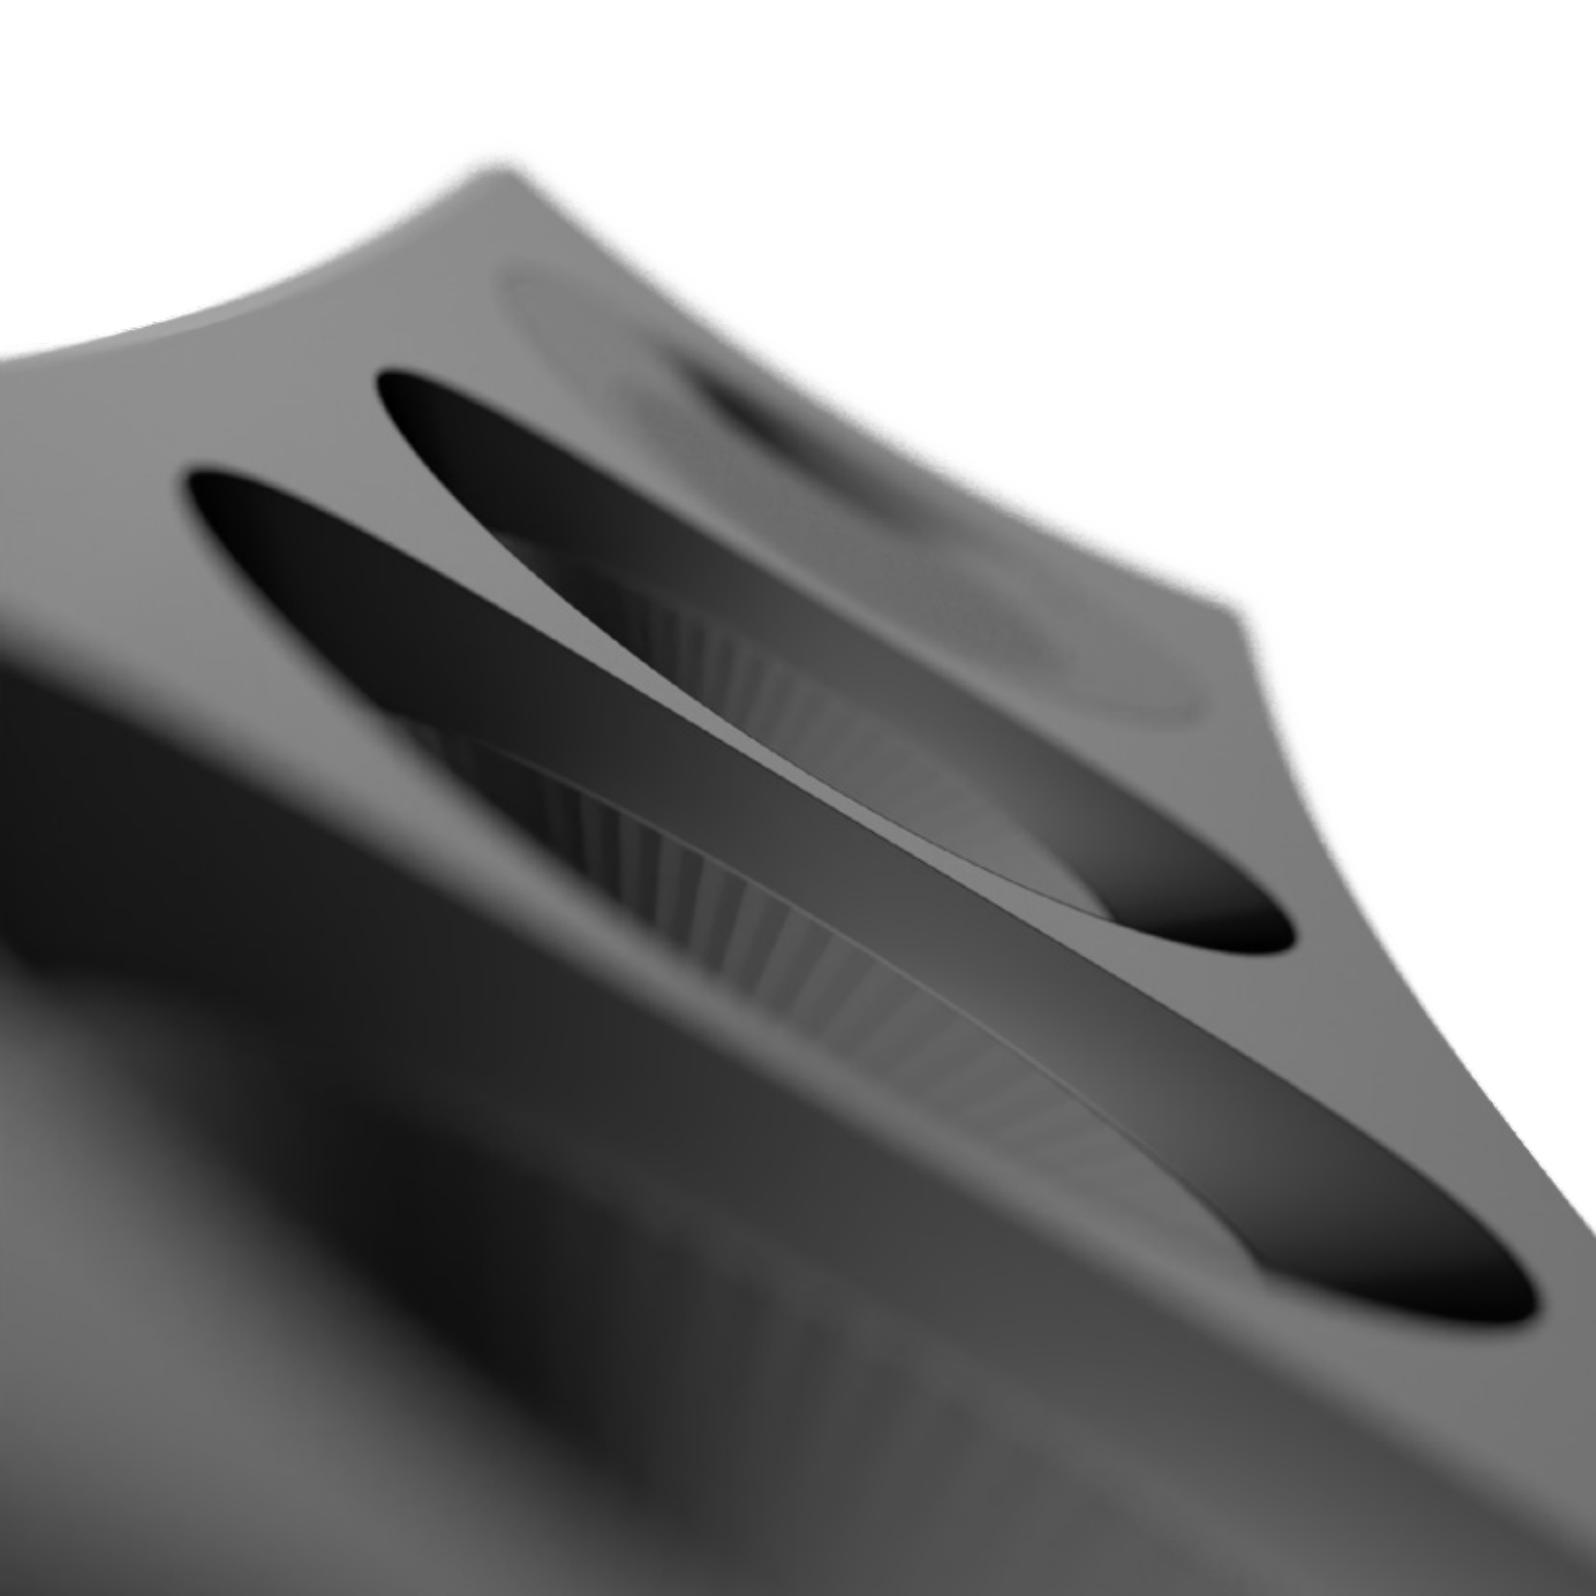

1528

TOWER

8



BASALT



POLAR




SPECIFICATIONS

Our high-end flagship speaker designed to set new standards in sound quality. Engineered with bespoke drivers—including a 28mm Lithium-Magnesium tweeter, 5" Carbon-Graphene midrange, and four 8" Aluminium bass drivers—it delivers unparalleled clarity, deep bass, and a wide dynamic range.

Featuring adjustable frequency controls, sealed and ported modes, and an acoustically time-aligned driver baffle, the 1528 Tower 8 ensures precise, distortion-free sound. Its ultra-solid, resonance-free cabinet and seamless design with no visible screws offer both superior performance and aesthetic refinement. For those seeking ultimate audio fidelity, the 1528 Tower 8 redefines high-end listening.

DESIGN	3-way
TWEETER	28 mm
MIDRANGE	5"
WOOFER	8"
ENCLOSURE	Sealed/Ported
ENCLOSURE MATERIAL	High Density Fiberboard (HDF)
CROSSOVER FREQUENCY	420Hz / 2800Hz
SENSITIVITY	89,5dB
MAX SPL (FULL-BANDWIDTH SIGNAL 20HZ-20KHZ, IEC60268)	118dB peak, 112dB RMS
FREQUENCY RESPONSE	42Hz-20kHz +-2dB
	F3 39Hz
	F6 26Hz
	F10 21Hz
PORT	140,5mm inner diameter
IMPEDANCE	4-ohms nominal
DIMENSIONS (CM)	135.0H x 29.0W x 54.8D cm
DIMENSIONS (IN)	53.2H x 11.4W x 21.6D in
DIMENSIONS WITH BASE SUPPORTS & PUCK+ (CM)	143.0H x 47.0W x 54.8D cm
DIMENSIONS WITH BASE SUPPORTS & PUCK+ (IN)	56.3H x 18.5W x 21.6D in
WEIGHT	79kg (excluding Puck+)
INCLUDES	Puck+, Floor Sliders, Port Plug, Grilles
RECOMMENDED AMPLIFIER	Up to 1000W

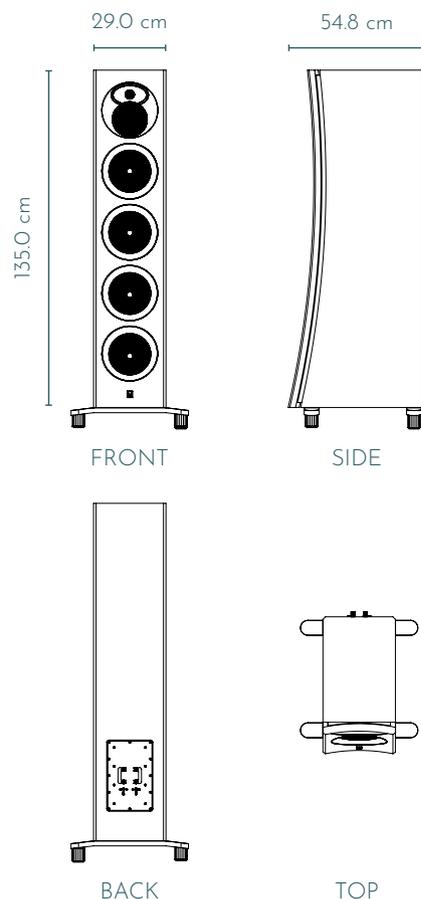

1528

MONITOR

8



BASALT



POLAR




SPECIFICATIONS

High end Tower performance in a smaller form factor, delivering high output, deep bass, and low distortion. Equipped with a 28mm Lithium-Magnesium tweeter, 5" Carbon-Graphene midrange, and dual 8" Aluminium bass drivers, it offers clear, dynamic sound with wide off-axis response.

With adjustable frequency controls, sealed and ported modes, and an acoustically time-aligned driver baffle, the 1528 Monitor 8 ensures precise, tailored sound. Its sleek design, resonance-free cabinet, and rhodium-plated bi-wire terminals combine performance and elegance, making it the ultimate choice for audiophiles seeking superior sound.

DESIGN	3-way
TWEETER	28 mm
MIDRANGE	5"
WOOFER	8"
ENCLOSURE	Sealed/Ported
ENCLOSURE MATERIAL	High Density Fiberboard (HDF)
CROSSOVER FREQUENCY	420Hz / 2800Hz
SENSITIVITY	85dB
MAX SPL (FULL-BANDWIDTH SIGNAL 20HZ-20KHZ, IEC60268)	114dB peak, 108dB RMS
FREQUENCY RESPONSE	38Hz-20kHz +-2dB
	F3 35Hz
	F6 22Hz
	F10 19Hz
PORT	103,5mm inner diameter
IMPEDANCE	4-ohms nominal
DIMENSIONS (CM)	80.8H x 29.0W x 44.8D cm
DIMENSIONS (IN)	31.8H x 11.4W x 17.6D in
WEIGHT	47kg
INCLUDES	Port Plug, Grilles
RECOMMENDED AMPLIFIER	Up to 700W

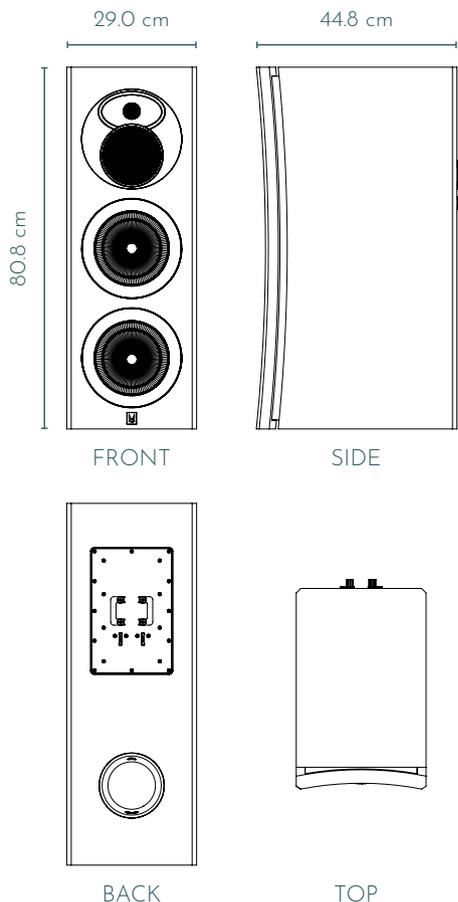

1528

BOOKSHELF 8



BASALT



POLAR




SPECIFICATIONS

The 1528 Bookshelf 8 is a powerful speaker designed to deliver high-end sound in a smaller form factor. Featuring a 28mm Lithium-Magnesium tweeter, 5" Carbon-Graphene midrange, and an 8" Aluminium bass driver, it offers exceptional clarity, deep bass extension, and low distortion.

With adjustable high and mid frequencies, sealed and ported modes, and acoustically time-aligned drivers, the 1528 Bookshelf 8 provides precise, custom-tailored sound. Its controlled directivity waveguide ensures a wide listening window, even off-axis. The ultra-solid, resonance-free cabinet and sleek design, combined with rhodium-plated bi-wire terminals, make it both a performance and aesthetic marvel, perfect for those seeking top-tier full-range sound in a bookshelf speaker.

DESIGN	3-way
TWEETER	28 mm
MIDRANGE	5"
WOOFER	8"
ENCLOSURE	Sealed/Ported
ENCLOSURE MATERIAL	High Density Fiberboard (HDF)
CROSSOVER FREQUENCY	420Hz / 2800Hz
SENSITIVITY	84dB
MAX SPL (FULL-BANDWIDTH SIGNAL 20HZ-20KHZ, IEC60268)	111dB peak, 105dB RMS
FREQUENCY RESPONSE	42Hz-20kHz +-2dB
	F3 37Hz
	F6 28Hz
	F10 19Hz
PORT	71,5mm inner diameter
IMPEDANCE	4-ohms nominal
DIMENSIONS (CM)	55.5H x 29.0W x 36.8D cm
DIMENSIONS (IN)	21.9H x 11.4W x 14.5D in
WEIGHT	30kg
INCLUDES	Port Plug, Grille
RECOMMENDED AMPLIFIER	Up to 500W

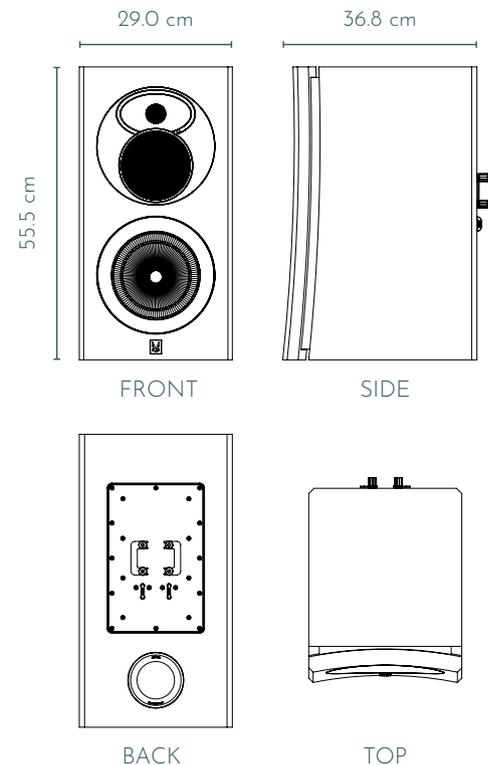

1528

SLIM

8



BASALT



POLAR




SPECIFICATIONS

The 1528 Slim 8 is our the most versatile speaker in the 1528 range. With a shallow depth of just 19.8 cm and a sealed enclosure, it fits seamlessly into any setup—whether as a stereo or surround speaker, center channel, height speaker, or even placed on a TV low board. Its VESA100 mounting standard ensures easy installation.

Featuring the same configuration as the 1528 Bookshelf 8, it boasts a 28mm Lithium-Magnesium tweeter, 5" Carbon-Graphene midrange, and an 8" Aluminium bass driver for exceptional sound quality. Its controlled directivity waveguide and wide listening window ensure smooth, precise audio on and off axis.

With high output, low distortion, and a sleek satin finish, the 1528 Slim 8 delivers top-tier performance and adaptable design—perfect for any application.

DESIGN	3-way
TWEETER	28 mm
MIDRANGE	5"
WOOFER	8"
ENCLOSURE	Sealed
ENCLOSURE MATERIAL	High Density Fiberboard (HDF)
CROSSOVER FREQUENCY	420Hz / 2800Hz
SENSITIVITY	84dB
MAX SPL (FULL-BANDWIDTH SIGNAL 20HZ-20KHZ, IEC60268)	111dB peak, 105dB RMS
FREQUENCY RESPONSE	57Hz-20kHz +-2dB
	F3 55Hz
	F6 48Hz
	F10 36Hz
IMPEDANCE	4-ohms nominal
DIMENSIONS (CM)	55.5H x 29.0W x 19.8D cm
DIMENSIONS (IN)	21.9H x 11.4W x 7.8D in
WEIGHT	23 kg
INCLUDES	VESA 100 Wall Mount, Grille
RECOMMENDED AMPLIFIER	Up to 400W

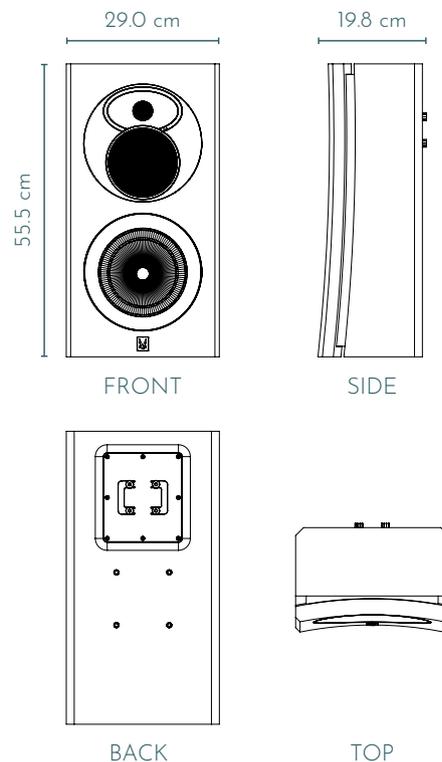

1528

CENTER+

8



BASALT



POLAR


SPECIFICATIONS

The pinnacle of high-end center speakers. With the same configuration as the 1528 Tower 8, it is the perfect timbre-matched centerpiece for any high-performance system. Featuring a 28mm Lithium-Magnesium tweeter, 5" Carbon-Graphene midrange, and four 8" Aluminium bass drivers, it delivers high output, deep bass extension, and low distortion with a wide dynamic range.

Designed with a controlled directivity waveguide and an acoustically time-aligned driver baffle, the 1528 Center+ 8 offers smooth, precise sound with an expansive listening window—even when seated off-axis. Its 3-way design, combined with sealed and ported modes, ensures superior sound performance for any home theater setup.

This center speaker, one of the largest on the market, features a sleek satin finish, ultra-solid HDF construction, and resonance-dampening materials for quiet, inert operation. With high-end rhodium-plated bi-wire terminals and seamless design, the 1528 Center+ 8 sets a new standard for high-end center speakers, offering unmatched sound and elegance.

DESIGN	3-way
TWEETER	28 mm
MIDRANGE	5"
WOOFER	8"
ENCLOSURE	Sealed/Ported
ENCLOSURE MATERIAL	High Density Fiberboard (HDF)
CROSSOVER FREQUENCY	420Hz / 2800Hz
SENSITIVITY	89,5dB
MAX SPL (FULL-BANDWIDTH SIGNAL 20HZ-20KHZ, IEC60268)	118dB peak, 112dB RMS
FREQUENCY RESPONSE	45Hz-20kHz +-2dB
	F3 43Hz
	F6 29Hz
	F10 18Hz
PORT	2 x 103,5mm inner diameter
IMPEDANCE	4-ohms nominal
DIMENSIONS (CM)	29.0H x 135.0W x 54.8D cm
DIMENSIONS (IN)	11.4H x 53.2W x 21.6D in
WEIGHT	82kg
INCLUDES	Port Plugs, Grilles
RECOMMENDED AMPLIFIER	Up to 1000W

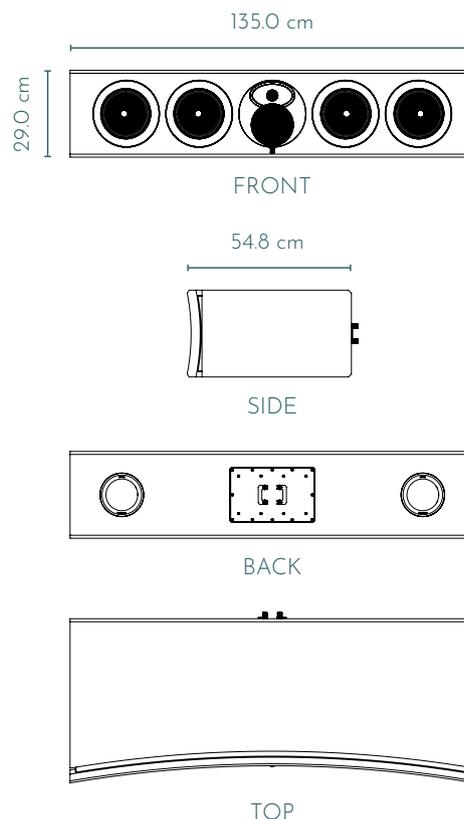

1528

CENTER

8



BASALT



POLAR


SPECIFICATIONS

The 1528 Center 8, the smaller yet still substantial counterpart to the Center+ 8. Built with the same configuration as the 1528 Monitor 8, it is the perfect timbre-matched center speaker for any setup, including the Tower 8, Monitor 8, Bookshelf 8, and Slim 8.


Featuring a 28mm Lithium-Magnesium tweeter, 5" Carbon-Graphene midrange, and dual 8" Aluminium bass drivers, the 1528 Center 8 delivers high output, deep bass extension, and low distortion with a wide dynamic range. Its 3-way design, acoustically time-aligned baffle, and controlled directivity waveguide ensure precise, smooth sound, even for off-axis listeners.

With both sealed and ported modes, a compound curve front baffle, and an ultra-solid HDF cabinet, this speaker is designed for exceptional performance and durability. The high-end satin finish and seamless design with no visible screws make the 1528 Center 8 as visually stunning as it is acoustically refined. Perfect for high-end home theater systems, this center speaker delivers clarity, depth, and power.


DESIGN	3-way
TWEETER	28 mm
MIDRANGE	5"
WOOFER	8"
ENCLOSURE	Sealed/Ported
ENCLOSURE MATERIAL	High Density Fiberboard (HDF)
CROSSOVER FREQUENCY	420Hz / 2800Hz
SENSITIVITY	85dB
MAX SPL (FULL-BANDWIDTH SIGNAL 20HZ-20KHZ, IEC60268)	114dB peak, 108dB RMS
FREQUENCY RESPONSE	38Hz-20kHz +-2,5dB
	F3 35Hz
	F6 22Hz
	F10 19Hz
PORT	103,5mm inner diameter
IMPEDANCE	4-ohms nominal
DIMENSIONS (CM)	29.0H x 80.8W x 44.8D cm
DIMENSIONS (IN)	11.4H x 31.8W x 17.6D in
WEIGHT	47kg
INCLUDES	Port Plug, Grilles
RECOMMENDED AMPLIFIER	Up to 700W

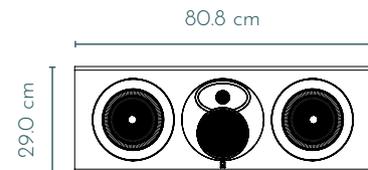


FRONT




SIDE



BACK




TOP

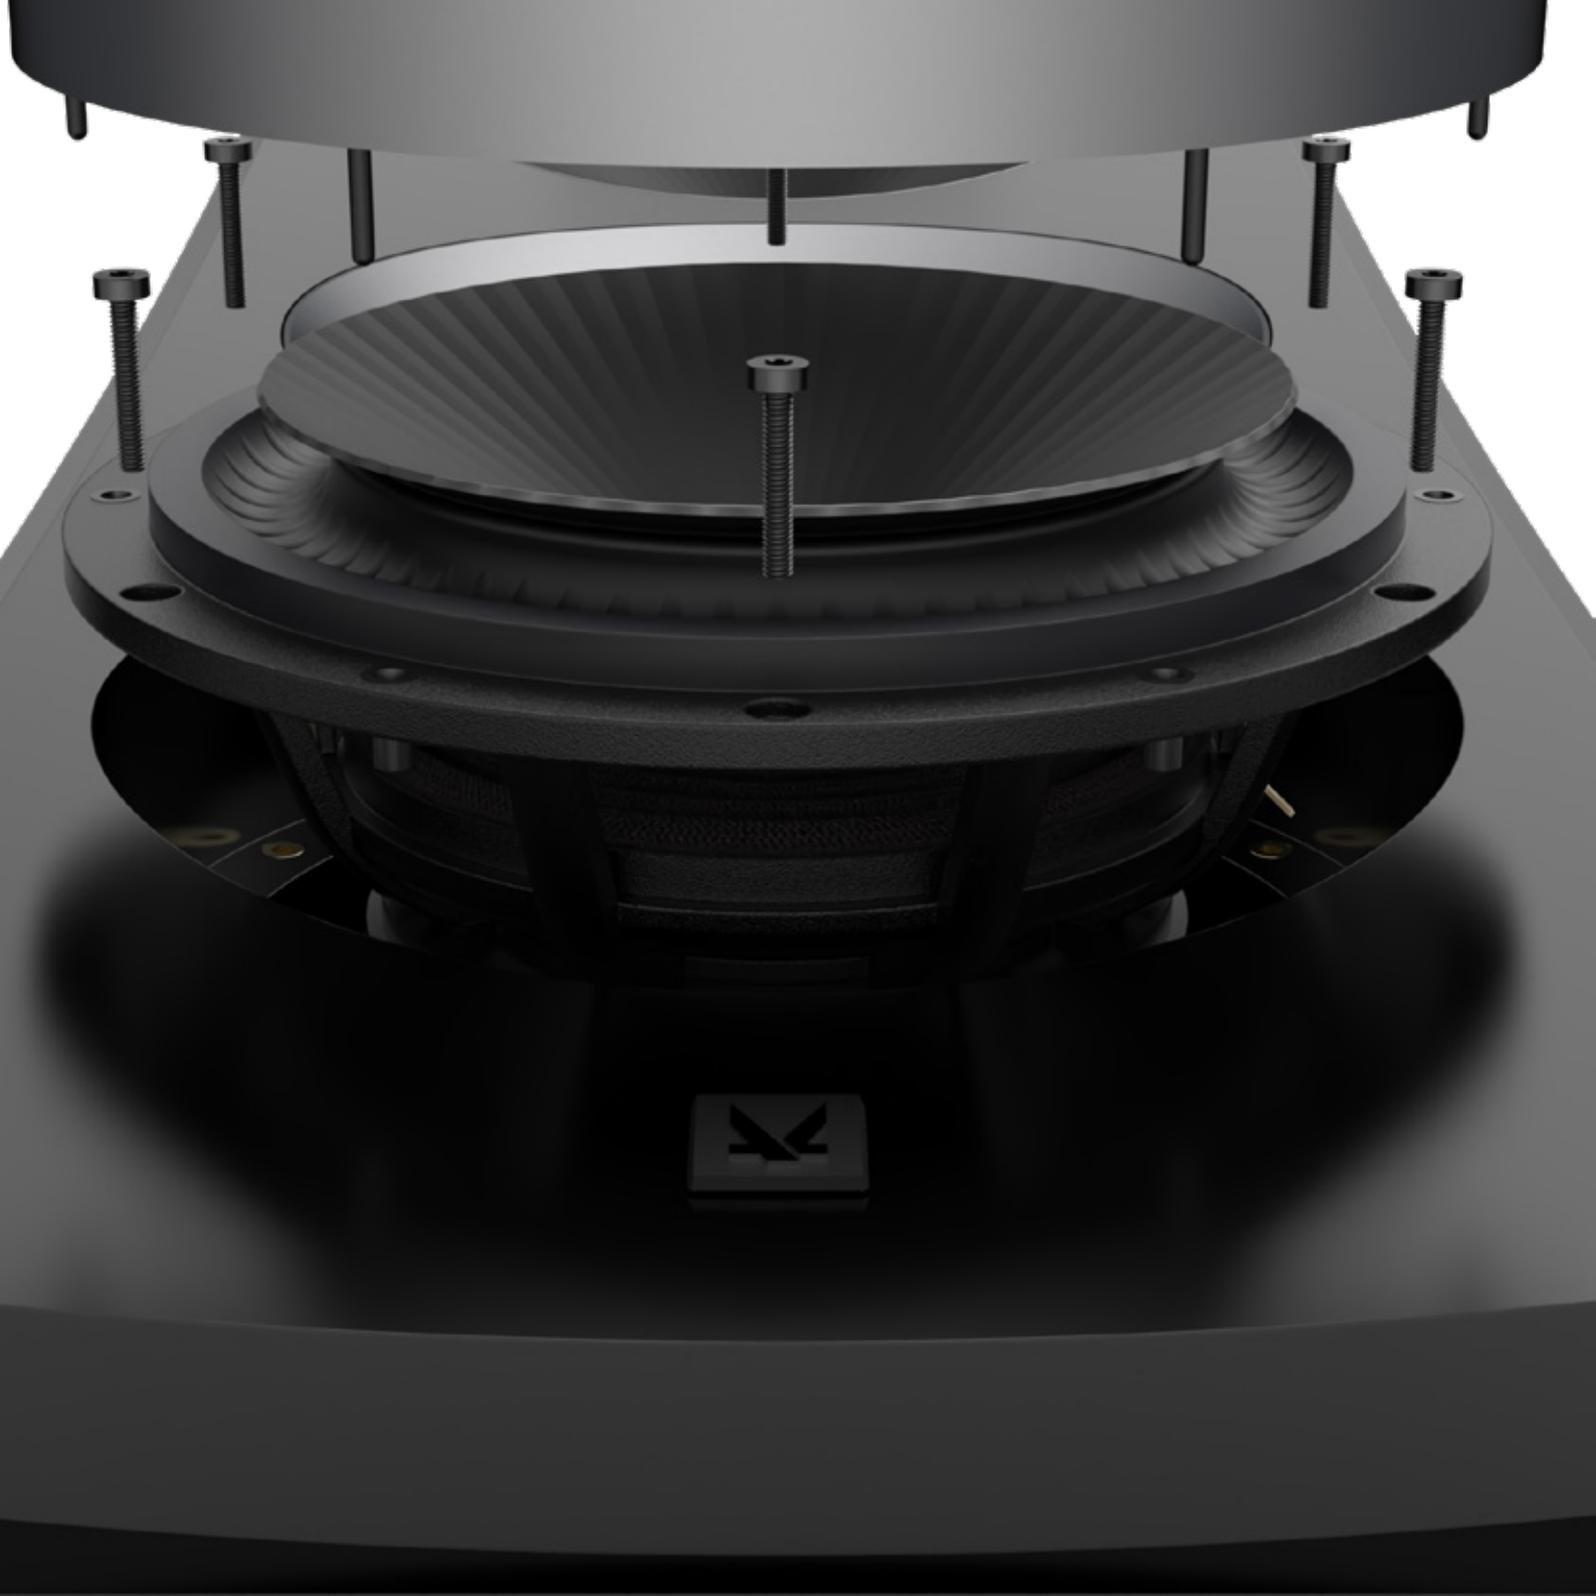

PREMIUM BUILD QUALITY

The 1528 series of speakers epitomizes high-end craftsmanship and build quality. Each speaker is housed in a custom cabinet featuring a unique compound curve—curved on two axes—for a sophisticated look and enhanced acoustics. The curved, decoupled front baffle is incredibly thick, aligning the drivers in time for a more coherent and immersive soundstage. Constructed entirely of high-density fiberboard (HDF), these cabinets are exceptionally heavy and inert, reducing unwanted vibrations. Inside, extensive bracing and butyl dampening further eliminate resonance, ensuring pure sound. Custom-designed grilles perfectly complement the integrated grilles on the tweeter and midrange, while the tower model boasts premium base supports for stability. 1528, a pinnacle of acoustic engineering and aesthetic elegance.

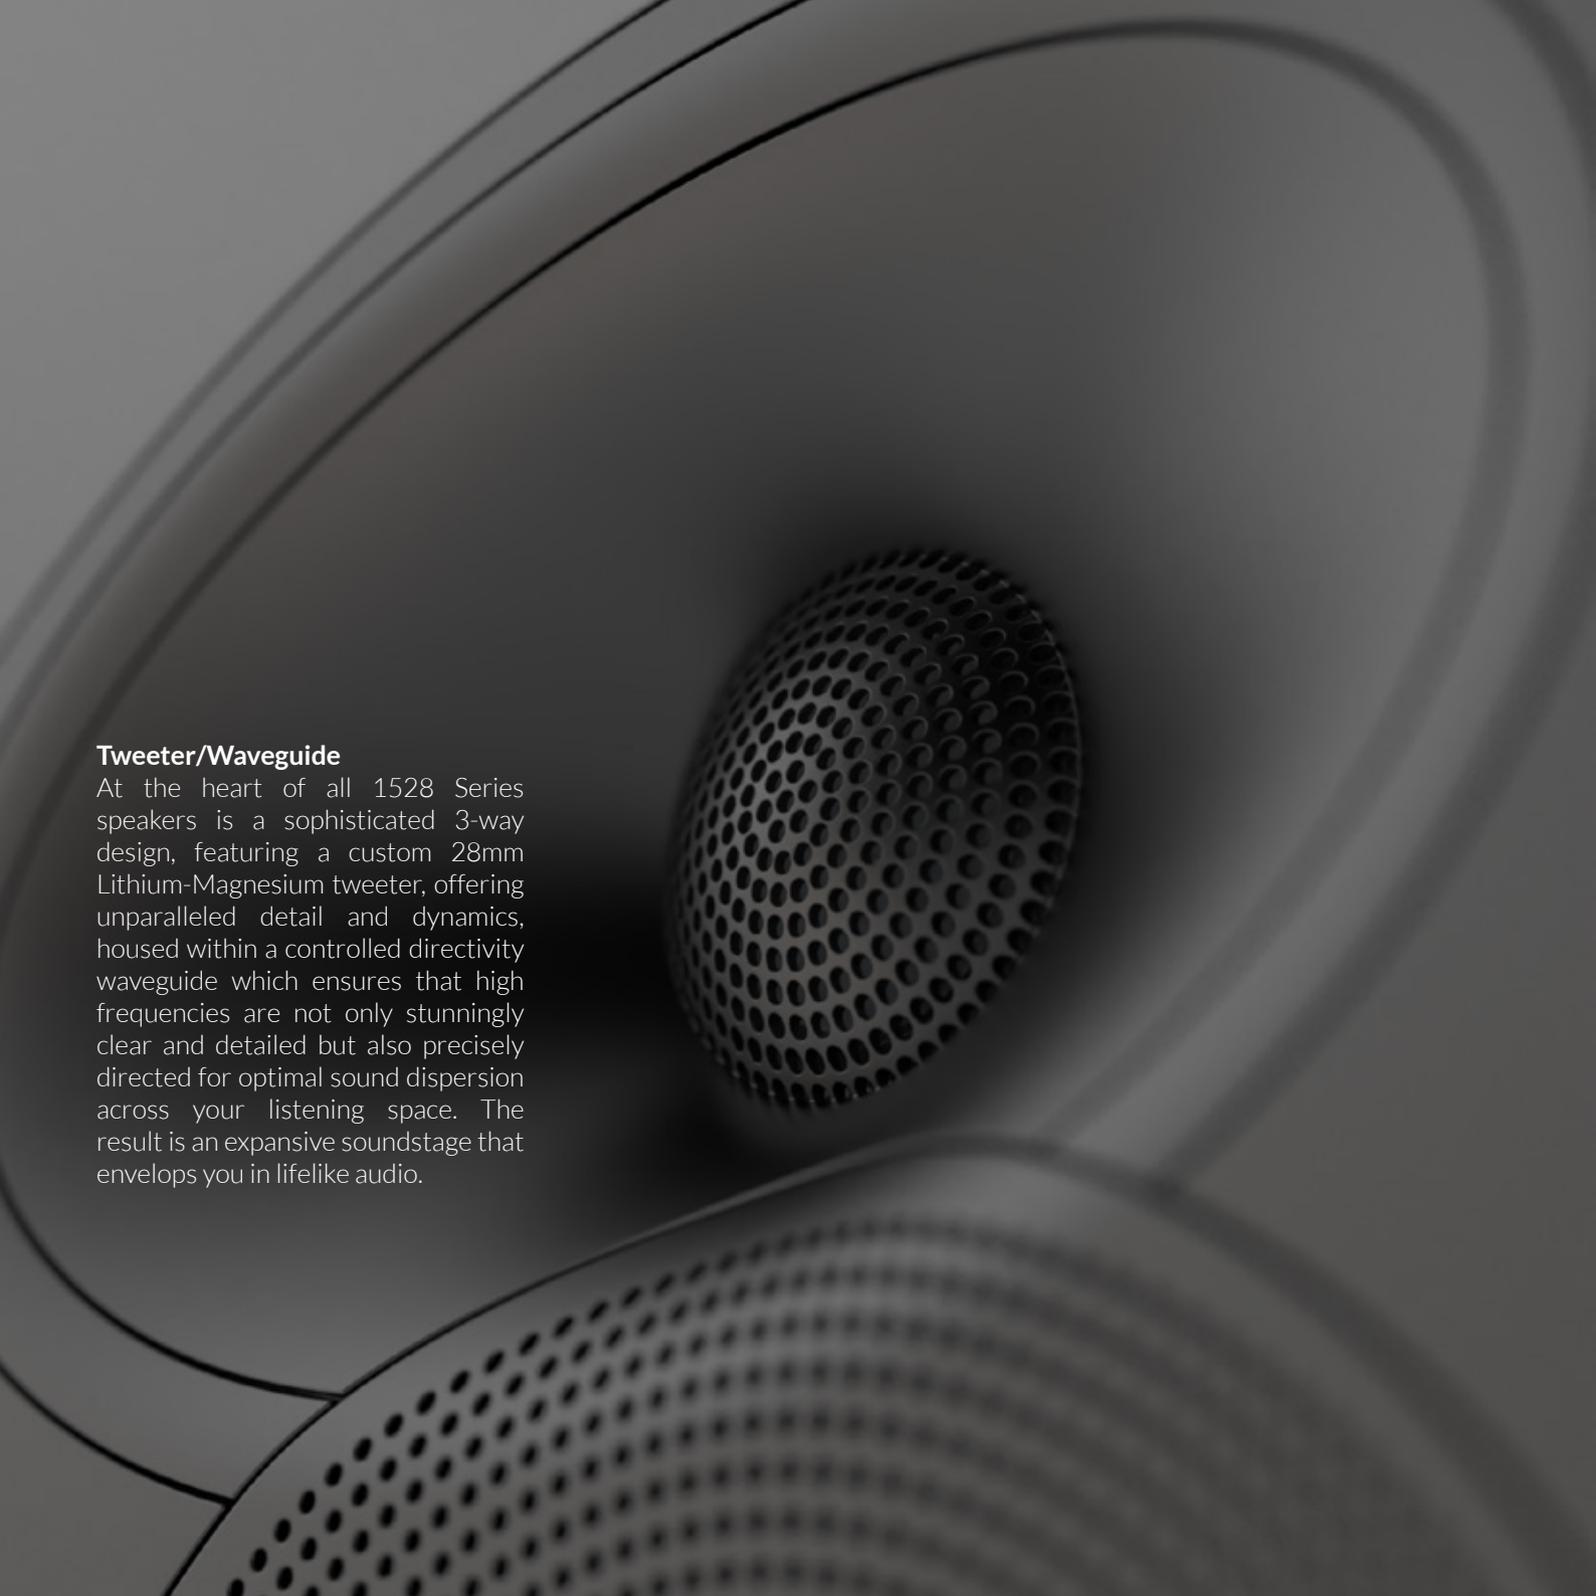A close-up, monochromatic photograph of a speaker's tweeter and waveguide. The tweeter is a small, circular component with a fine, perforated mesh, positioned within a larger, curved waveguide structure. The lighting creates soft shadows and highlights the texture of the mesh and the smooth curves of the surrounding housing. The overall aesthetic is clean and technical.

Tweeter/Waveguide

At the heart of all 1528 Series speakers is a sophisticated 3-way design, featuring a custom 28mm Lithium-Magnesium tweeter, offering unparalleled detail and dynamics, housed within a controlled directivity waveguide which ensures that high frequencies are not only stunningly clear and detailed but also precisely directed for optimal sound dispersion across your listening space. The result is an expansive soundstage that envelops you in lifelike audio.

Midrange

The 5" Carbon-Graphene midrange driver further enhances this experience, providing exceptional accuracy and minimal distortion. It delivers rich, natural sound that seamlessly blends with the crisp highs, making every note, dialogue, and musical detail come alive with incredible realism.





Bass drivers

Complementing the tweeter/midrange combo are our custom 8" aluminum long-throw bass drivers, each with inverted surrounds and a prism ridge structure for added stiffness. These drivers produce deep, impactful bass that you can feel as much as hear. They are all housed within a robust, acoustically optimized cabinet.

ARENDAAL® | 1528

TOWER 8

DESIGNED IN NORWAY

From Norway with Love

Speaker Terminal

The input terminals on the 1528 speakers are designed for both performance and flexibility. They feature custom rhodium-plated copper bi-wire binding posts, ensuring superior conductivity and durability for high-quality audio signals. The level adjustment system allows you to fine-tune the speaker's response to your room's acoustics and preferences, with integrated jumpers for the tweeter and midrange level. (for Tower 8, Monitor 8, Bookshelf 8). Anodized terminal plate provides a sleek and durable finish, while high-quality rhodium-plated copper bi-wire jumpers eliminate the need for inferior steel connections, preserving sound clarity and integrity.






Puck Pro

Welcome to the next level of acoustic performance with the Puck Pro, the ultimate upgrade for your 1528 Tower 8. Designed to surpass the standard Puck+, the Puck Pro offers superior decoupling and isolation from the floor, enhancing clarity and expanding the soundstage like never before.

Crafted with precision, the Puck Pro features a machined aluminum cup with a unique prism ridge design, paired with a more compliant soft rubber compound that excels in absorbing vibrations. Capable of handling up to 100kg, these feet provide robust support while ensuring optimal performance.

With up to 10mm of height adjustability, alignment and tilt are made easy, especially critical for the 1528 Tower 8. A printed-on scale in 1mm increments guarantees consistency, while M10 threads and tool-free adjustment offer hassle-free setup—though an Allen key can be used if desired. Each set includes 4 pieces, giving you everything you need for a flawless installation.

Enhance your sound experience with the Puck Pro and enjoy the difference in every note.

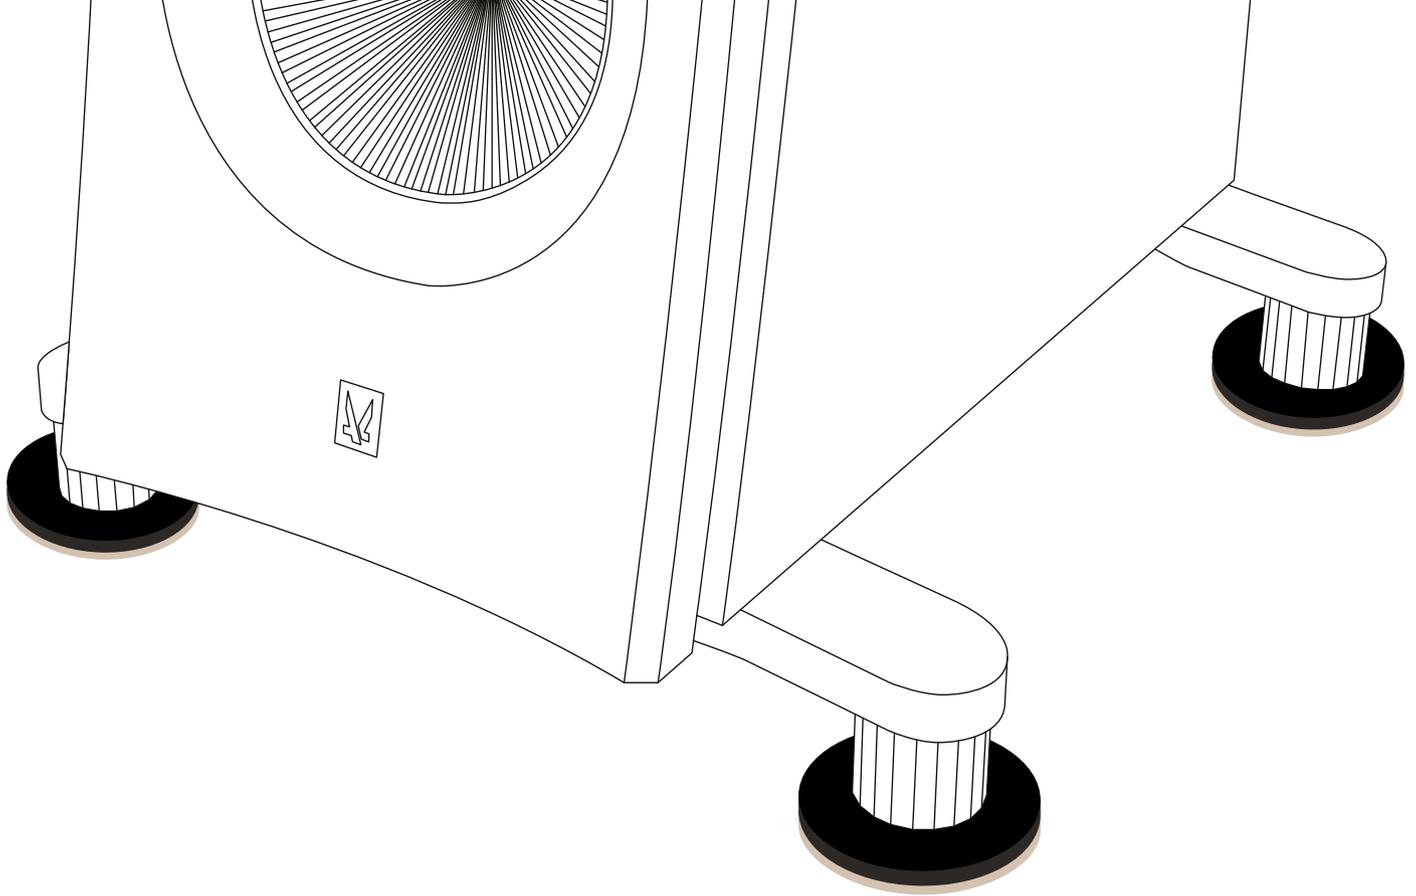

Floor Sliders

To make setup as easy as possible we include two types of floor sliders with our 1528 Tower 8. One is for hard surfaces like wooden floors, tiles, stone, PVC, and laminate, with a felt type material bottom and the other one is for carpets with a plastic bottom for easy maneuverability of the speaker. You just place the speaker with its Puck+ or Puck Pro rubber feet directly on the black foam top part of the slider. When moving the speaker always make sure you pull it from the bottom, best to hold it from the metal base supports. That will ensure a safe movement. Do not push or try to move the speaker from the top! After you have found the perfect location remove the sliders for optimal stance and decoupling.



Hard floor
slider





Carpet type
slider



HOW TO CONNECT

Single-Wire


This is the most commonly used connecting method and the one we recommend. You connect your single wiring cable from your amp to one pair of the binding posts on the speaker. Make sure the jumpers are tight and secure.

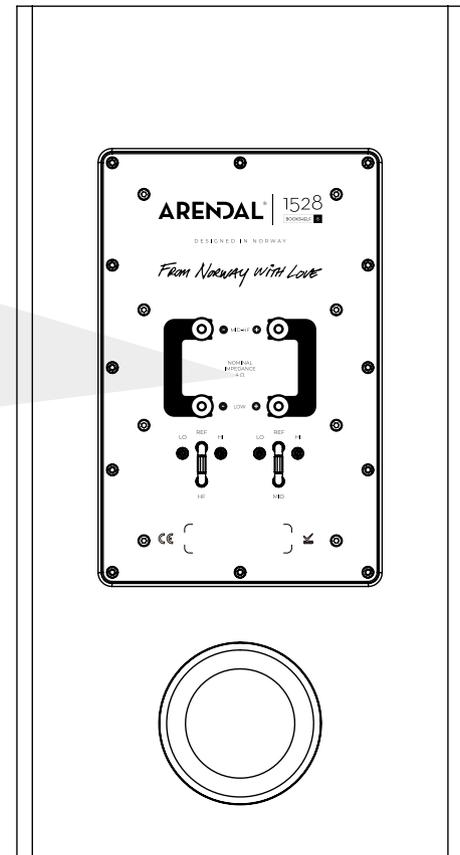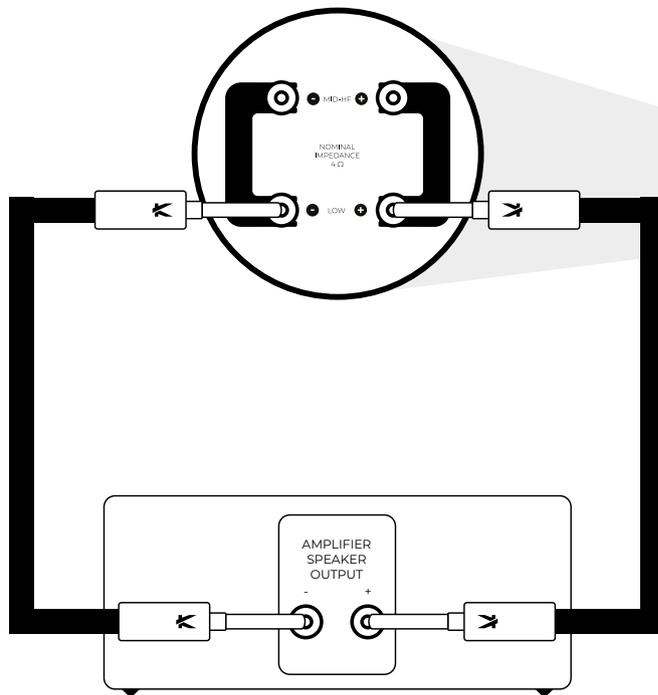

Bi-Wire

For Bi-Wiring you need to remove the jumpers between the 4 binding posts. The two ends on the speaker side merge into one end on the amplifier side.



Be aware of the correct polarity.

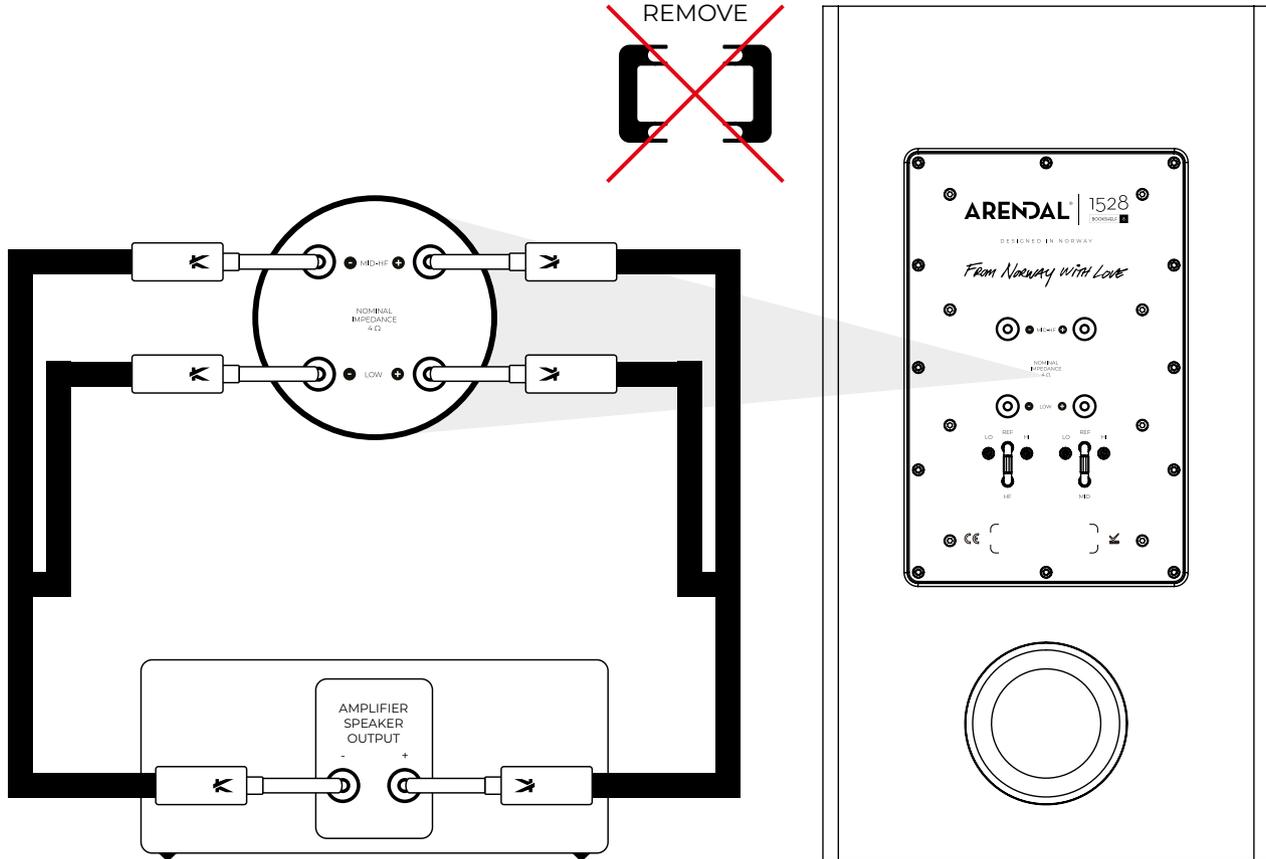

Bi-Amping

Bi-Amping uses two individual amplifiers. One amplifier for the tweeter and midrange section (MID-HF) and one amplifier for the bass (LOW). You need to remove the jumpers between the 4 binding posts, and connect the amplifiers with a single wire cable each. Please note that both amplifiers should be gain matched, so you have the correct balance between the two frequency sections.

Warning: Amplifiers must be shut off while connecting.

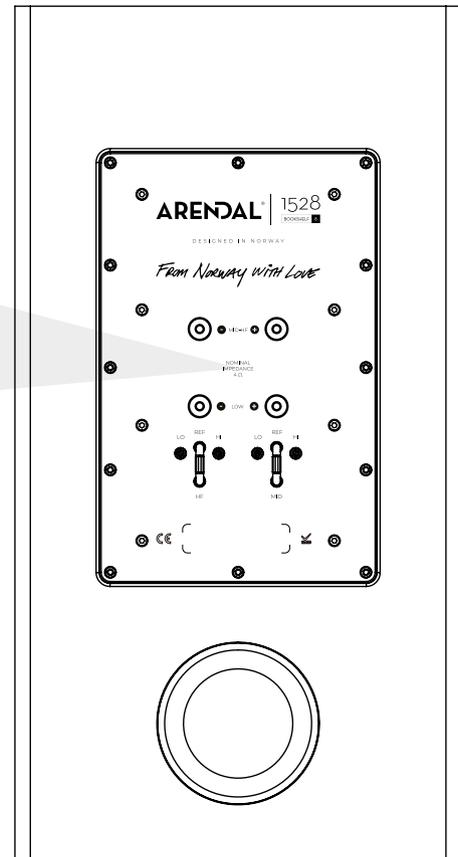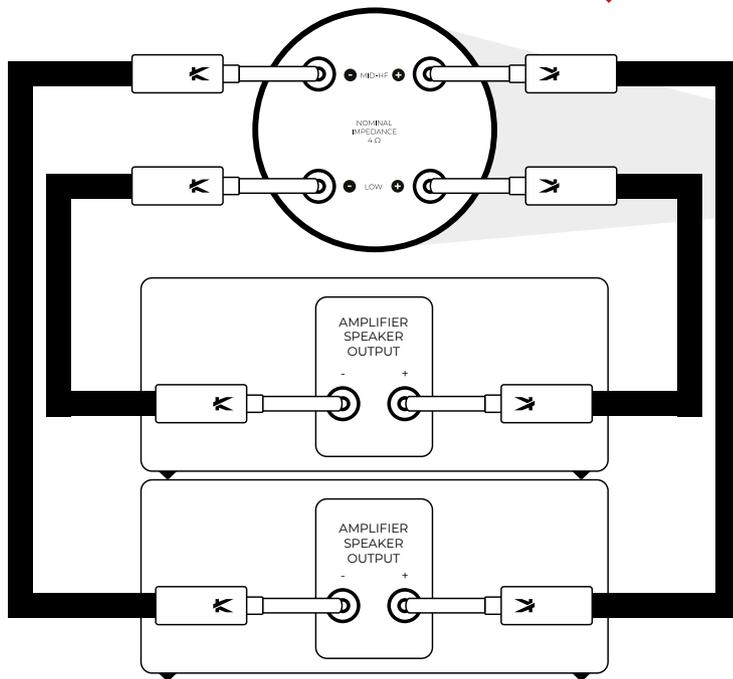

PLACEMENT AND SETUP - *SPEAKERS*

The placement of your speakers and the acoustics of your room have the biggest impact on the sound quality you'll experience. Whether you're setting up a HiFi stereo system or a home theater, getting the placement right is essential—no EQ or high-end processor can compensate for poor positioning. That's why it's important to take your time and get it right, and this quick guide will help you achieve great sound in no time.

Please reach out to our customer support team for individual advice!

Aim to position your speakers as symmetrically as possible in relation to the walls—grab a tape measure if you need to! Make sure nothing is obstructing the sound, and try to minimize hard, reflective surfaces when possible.


Distance to walls

The controlled directivity design of our 1528 speakers makes them easier to integrate into most rooms, as both direct and reflected sound maintain the same signature. Still, keeping some distance from the walls will always improve your sound!

We recommend keeping at least 30cm of space between your speakers and the nearest walls—the more distance, the better. Placing the speakers too close can result in a muddy, overly boomy sound, which you'll want to avoid. This can also affect the clarity of voices, as the lower frequencies can overpower the higher ones.

Since every room is different and personal preferences vary, we suggest experimenting with distances to find what sounds best for you. For the 1528 Tower 8, we've included sliders for both hard floors and carpets, making it easier to move the speakers and find the perfect spot. Once you're satisfied with the placement, you can remove the sliders.

The 1528 Slim 8 is the exception in this line as it has a sealed enclosure and works very well even right against the wall.

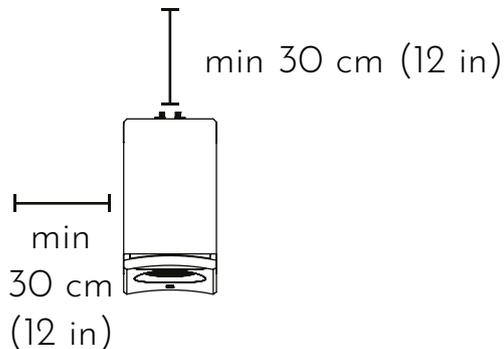

Sealed/Ported mode

All speakers in the 1528 Line (except for the sealed Slim 8 model) come with plugs for the bass-reflex port. If your placement options are limited and you need to position the speaker near a wall or in a corner, sealing the port can help balance the sound by reducing low-end output. This can be particularly effective when used alongside a subwoofer, as it creates a more controlled bass response.

For the 1528 Center+ 8 only use full open or full sealed on the ports!


There's no definitive right or wrong approach here—experiment with different configurations to see what works best for your setup.



Listening distance

The standout feature of the 1528 Series is its compound curve front baffle, designed to align all the individual drivers so that sound reaches the listener's ears simultaneously. This mechanical alignment ensures optimal phase coherency, resulting in a more dynamic and accurate soundstage.


While physics dictates that there is only one optimal listening distance where the drivers converge perfectly—4 meters from the front baffle—you'll still experience significant benefits above and below that range. However, we recommend maintaining a minimum listening distance of 2.5 meters (100 in) for the Tower 8, Monitor 8 models, and at least 1.5 meters (60 in) for the 1528 Bookshelf 8, Slim 8, Center+ 8, and Center 8.

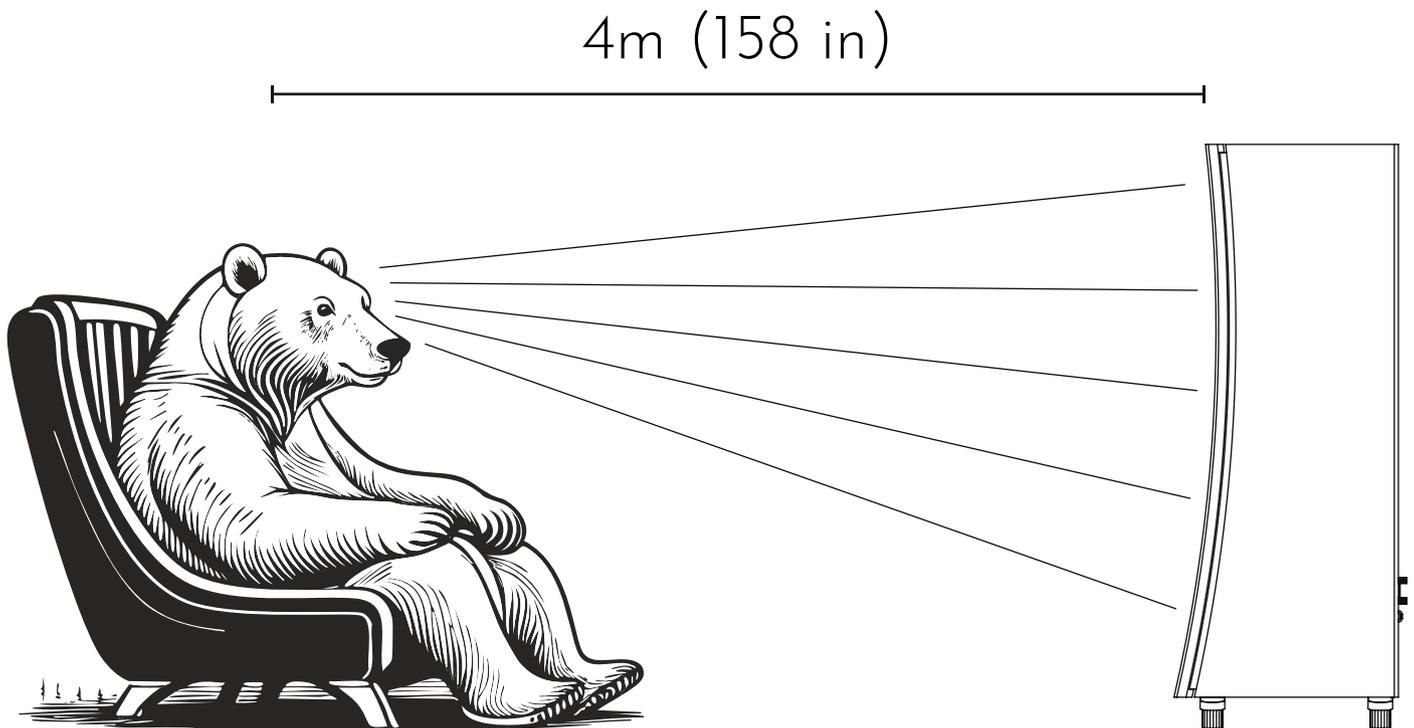

Listening height

Listening height is just as crucial as listening distance. Ideally, the speaker's acoustic center, located between the tweeter and midrange drivers, should be angled towards the ear level. For easy angle adjustments, you can use the optional Puck Pro+ which lets you adjust the height on front vs rear feet to accommodate the perfect angle for your seating placement.

As a reference, the optimal listening height for the 1528 Tower 8 is 98cm (38.6 in) at a 4-meter distance. Avoid positioning the speakers too high or too low, as this can result in an unclear sound, particularly in the vocal range.

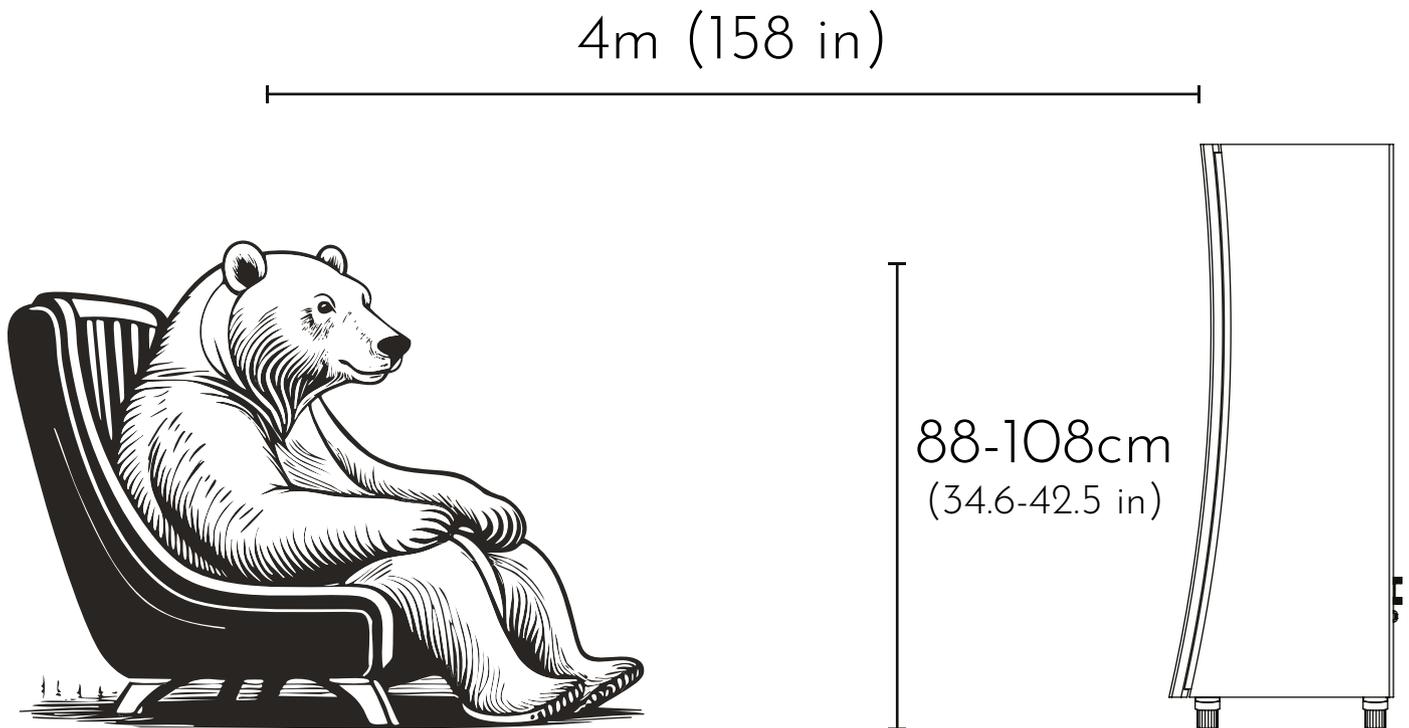

Toe-in


Toe-in is a highly personalized aspect of speaker setup, and we strongly recommend experimenting with it, as it significantly influences the sound. Preferences vary greatly, so finding what works best for you is key.

When we refer to a 0-degree toe-in, it means the speakers are parallel to the front and rear walls, pointing straight into the room. A 45-degree toe-in positions the speakers directly toward the listener, forming an equilateral triangle.

The more you angle the speakers toward the listener, the more direct and focused the sound becomes, particularly enhancing the center image.

Conversely, angling the speakers more toward the room will result in a less focused center image, creating a wider, more expansive soundstage with increased overall scale.

Depending on your personal preferences and your speaker configuration (whether for stereo or home cinema), you may favor one approach over the other.

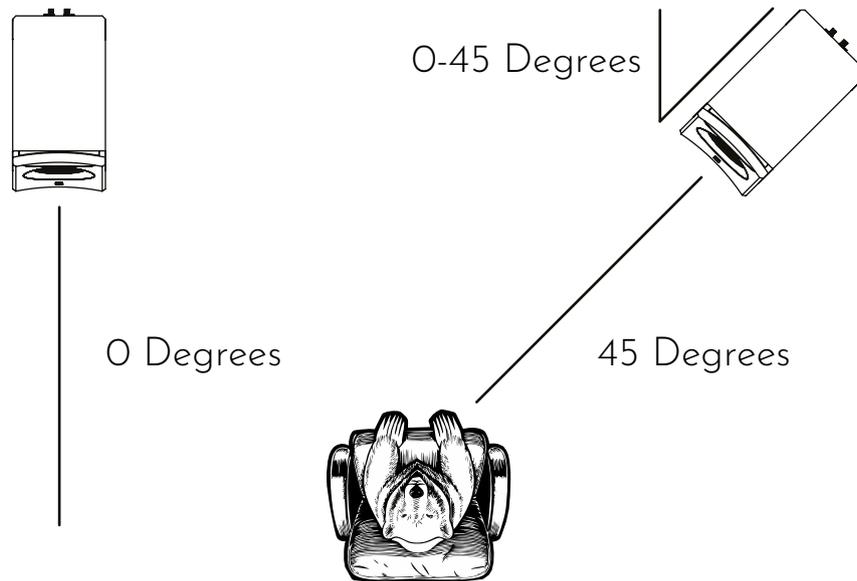



Level Adjustment

We've introduced a new feature to the 1528 Series that simplifies achieving the perfect sound balance. The level adjustment jumpers on the back of the 1528 Tower 8, Monitor 8, and Bookshelf 8 allows you to adjust the tweeter and/or midrange sections individually by 2dB, either boosting or attenuating the sound.

This provides excellent flexibility to accommodate various room acoustics and personal preferences. Simply move the jumper from the REF (Reference) position to either the LO (Low) or HI (High) setting, and you're good to go.

Surround specific setup tips

With the constant evolution of formats like Dolby Atmos, DTS-X, IMAX Enhanced, and Auro-3D, placing surround speakers has become increasingly complex. Numerous variables and configurations require precise positioning, and covering all of them is beyond the scope of this guide.

Our primary advice is to follow the specific recommendations of the surround format you're using. Companies like Dolby offer detailed placement guides that can help. If you need further assistance, feel free to contact our support team for personalized guidance!








SAFETY INSTRUCTIONS

- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- **Do not shower or bathe (with) this product. It does not like water nor soap.**
- Do not restrict the natural ventilation for this product. Do not cover amplifier plate with polar bear hide or similar as this product is built to handle even the cold northern climates without such heating devices.
- **Large house pets like dogs, big cats or bears should be trained not to cuddle or sleep against this product to avoid overheating, scratches and bite marks.**
- Clean this product only with dry cloth.
- Do not install near any heat sources such as an open fireplace, radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Protect the power cord, signal cables or speaker cables from being walked on, chewed on or pinched particularly at plugs and the point where they exit from the apparatus.
- Only use attachments and accessories specified by the manufacturer.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- Check that there are no cables under the carpet that may be damaged by the spike/cone feet. Do not walk the product on the spike feet as this may cause them to become detached from the cabinet and cause damage. Take care not to impale yourself with the spike feet.
- Do not place this product on an unstable stand, tripod, bracket or table. The product may fall causing serious injury and serious damage. Any mounting of the product should follow the manufacturer's instructions.



- For continued protection against fire hazard, use fuses only of the correct type and rating. Mains fuses are located inside the appliance as well as on its back panel. Replacement of the internal fuse should be entrusted to an authorized operative. User-replaceable fuse types are shown in the specification.
- **WARNING:** To reduce the risk of fire or electric shock, this apparatus should not be exposed to rain, snow or moisture and objects filled with liquids, such as vases, should not be placed on this apparatus.
- The mains plug of the power supply cord shall remain readily operable.

- **WARNING:** This product is capable of producing very high sound pressure levels. Please exercise restraint in its operation to prevent hearing damage.

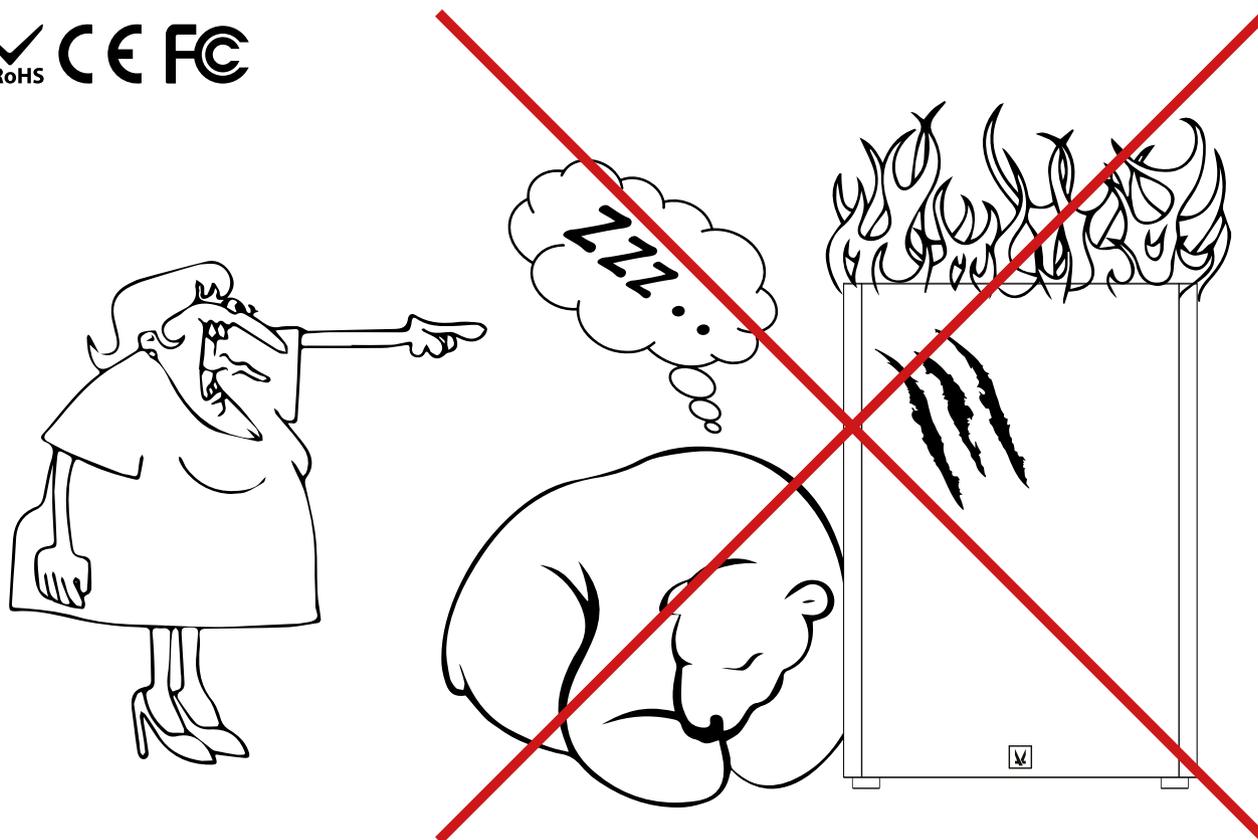



SICHERHEITSANWEISUNGEN

- Lesen Sie diese Anweisungen.
- Bitte diese Anweisungen aufbewahren.
- Folgen Sie diese Anweisungen.
- Bitte alle Warnungen beachten.
- Nehmen Sie keine Dusche oder Bad mit diesem Produkt. Es mag weder Wasser noch Seife.
- Die natürliche Durchlüftung darf nicht eingeschränkt werden. Dieses Produkt kann selbst die Kälte des Nordens ohne Kälteschutzmaßnahmen vertragen und darf daher mit einem Bärenfell oder ähnliches nicht bedeckt werden.
- Große Haustiere wie Hunde, Katzen oder Bären müssen abgerichtet werden, nicht mit diesem Produkt zu kuscheln oder neben dem Produkt zu schlafen, um Überhitzung, Kratzer oder Bissspuren zu vermeiden.
- Reinigen Sie dieses Produkt ausschließlich mit einem trockenen Tuch.
- Halten Sie dieses Produkt fern von Hitzequellen wie offenem Feuer, Heizungskörper, Kachelöfen oder anderen wärmestrahrenden Geräten, einschließlich Audioverstärker.
- Schützen Sie das Stromkabel, die Cinchkabel oder Lautsprecherkabel gegen Bissen, Tritten oder Quetschungen, insbesondere an Steckverbindungen und in der Nähe des Geräts.
- Verwenden Sie ausschließlich vom Hersteller spezifiziertem Zubehör.
- Trennen Sie dieses Produkt vom Strom während Gewittern oder bei längeren Zeiten ausser Betrieb.
- Jegliche Wartungen und Reparaturen müssen vom Fachpersonal durchgeführt werden. Reparaturen sind bei jedem Defekt notwendig, z.B. Schaden am Stromkabel, beschädigte Stromstecker, Flüssigkeitseintritt, kleine Objekte verloren im Produkt, Aussetzung des Regens oder der Feuchtigkeit, Fehlbetrieb oder Sturz des Produkts.
- Stellen Sie sicher, dass keine Kabel unter dem Teppich durch die Gerätefüße beschädigt werden. Bewegen Sie das Produkt nicht auf die Gerätefüße, da sie dadurch vom Gehäuse gelöst werden können und Schäden verursachen können. Vermeiden Sie, sich selbst mit den Gerätefüße aufzuspießen.
- Stellen Sie das Produkt nie auf instabile Ständer, Stative, Tische oder Halterungen. Das Produkt kann in dem Fall stürzen und ernste Schäden/ Verletzungen herbeiführen. Die Anbringung bzw. das Aufstellen des Produkts darf ausschließlich nach den Anweisungen des Herstellers folgen.
- Um Brandgefahr zu vermeiden dürfen nur Sicherungen mit der passenden Spezifikationen verwendet werden.
- Die Netzsicherungen befinden sich im Gerät, sowie auf der Rückseite. Netzsicherungen im Gerät dürfen nur durch autorisiertes Fachpersonal ausgetauscht werden. Durch den Benutzer austauschbare Sicherungen werden in der Produktspezifikation angegeben.
- **WARNUNG:** Um Stromschlag oder Brandgefahr zu vermeiden, darf dieses Gerät dem Regen, der Schnee oder der Feuchtigkeit nicht ausgesetzt werden. Vasen oder andere Gefäße mit Flüssigkeiten dürfen auch nicht auf dieses Gerät gestellt werden.
- Der Stecker des Netzkabels muss jederzeit zugänglich bleiben.
- **ACHTUNG:** Dieses Produkt kann sehr hohe Schallpegel erzeugen. Mäßigung im Hörpegel über längere Zeiten ist angebracht, um Gehörschäden zu vermeiden.



SIKKERHETSINSTRUKSJONER

- Les disse instruksjonene.
- Ta vare på disse instruksjonene.
- Vær oppmerksom på alle advarsler.
- Følg alle instruksjonene.
- Ikke bad (med) dette produktet. Det liker ikke hverken vann eller såpe.
- Ikke begrens den naturlige ventilasjonen for dette produktet. Ikke tildekk forsterker platen med isbjørnpels eller liknende, da produktet er bygget for å håndtere selv de kaldeste nordlige klima uten slike varmeprodukter.
- Store husdyr som hund, katt eller bjørn må læres opp til å ikke kose eller sove mot produktet for å unngå overoppheting, skrap og bitemerker.
- Rens produktet kun med en tørr klut.
- Ikke installer nær varmekilder som åpent ildsted, varmeovn, peis eller andre apparater (inklusive forsterkere) som produserer varme.
- Beskytt strømkabelen, signalkabler eller høyttalerkabler fra å bli tråkket på, tygd på eller lagt i klem, spesielt nær plugg eller der de stikker ut fra apparatet.
- Benytt kun tilleggsutstyr og tilbehør som er spesifisert av produsenten.
- Koble apparatet fra strømmettet under tordenvær eller når det ikke skal brukes over lengre perioder.
- Henvis all service til kvalifisert servicepersonell. Service kreves når apparatet har blitt skadet på noe vis, som når en strømkabel eller plugg er skadet, væske har blitt sølt eller objekter har falt ut av apparatet, apparatet har vært utsatt for regn eller fuktighet, ikke har normal funksjonalitet, eller har fått støt.
- Sjekk at det ikke er kabler under teppet som kan være skadet av spike/kone føtter. Ikke flytt produktet på spike føttene da det kan føre til at de faller av kabinettet og forårsaker skade. Ta hensyn slik at du ikke blir spiddet av spike føttene.
- Ikke plasser dette produktet på ustabil stativ, tripod, brakett eller bord. Produktet kan falle og forårsake seriøs skade. Montering av produktet skal følge produsents instruksjoner.
- For kontinuerlig beskyttelse mot brannfarer, bruk kun den korrekte type og verdi på sikringen(e). Hovedsikringene er lokalisert både på innsiden av produktet i tillegg til på panelet. Erstatning av de interne sikringene må gjøres av autorisert personell. Sikringer som kan byttes av bruker er vist i spesifikasjonene.
- ADVARSEL: For å redusere faren for elektrisk støt, må apparatet ikke utsettes for regn, snø eller fuktighet og gjenstander fylt med væske slik som vaser, skal ikke plasseres på apparatet.
- Strømkabelen til strømforsyningen skal være lett tilgjengelig.
- ADVARSEL: Dette produktet kan yte veldig høye lydtrykk. Vennligst vis aktsomhet for å unngå hørselsskader.



INSTRUCCIONES DE SEGURIDAD

- Lea estas instrucciones.
- Guarde estas instrucciones.
- Siga todas las advertencias.
- Siga todas las instrucciones.
- No se duche o bañe con este producto. El agua y el jabón dañarán este producto.
- No impida la ventilación natural de este producto. No cubra el amplificador con una piel de oso polar o una protección contra el frío similar. Este producto está diseñado para resistir incluso el clima frío del norte sin necesidad de calentadores.
- Animales domésticos de gran tamaño como perros, gatos o incluso osos han de ser instruidos para que no se acurruquen o duerman pegados a este producto para evitar sobrecalentamiento, rayaduras o marcas de dientes.
- Limpie este producto exclusivamente con un paño suave y seco.
- No instale este producto junto a fuentes de calor como radiadores, chimeneas, hornos u otros aparatos que produzcan calor (amplificadores incluidos).
- Proteja el cable de alimentación, los cables de señal y los cables de altavoz ante posibles pisotones, mordiscos o pinzaduras, especialmente cerca de los conectores y de las entradas/salidas del equipo.
- Use tan solo accesorios especificados por el fabricante.
- Desconecte este aparato durante tormentas eléctricas o períodos largos sin uso.
- Remita el equipo a personal cualificado para cualquier reparación. Una reparación será necesaria en caso de cualquier daño, como por ejemplo en el cable de alimentación o su enchufe, líquidos vertidos sobre el equipo, objetos perdidos dentro del equipo, exposición a lluvia o humedad, caídas o funcionamiento defectuoso.
- Compruebe que los cables no son pisados por los pies de apoyo del producto. No traslade este producto sobre sus pies de apoyo, ya que podrían aflojarse y causar daños. Evite empalar cualquier parte de su cuerpo con los pies de este producto.
- No coloque este producto sobre un soporte inestable. El producto podría caer, causando heridas y daños serios. El montaje de este producto ha de seguir las instrucciones del fabricante.
- Use tan sólo fusibles del tipo y especificación correctos a fin de evitar peligros de incendio. Los fusibles están situados dentro de este aparato, así como en su panel posterior. El reemplazo de fusibles debe ser realizado por personal cualificado y autorizado. Los fusibles que pueden ser reemplazados por el usuario se muestran en las especificaciones técnicas.
- ADVERTENCIA: no exponga este aparato a lluvia, nieve, o humedad ni coloque sobre él objetos con líquidos, como jarrones, a fin de reducir el riesgo de fuego o shock eléctrico.
- El enchufe de corriente del cable de alimentación debe permanecer accesible en todo momento.
- ADVERTENCIA: este producto es capaz de general niveles de presión sonora muy elevados. Úselo con la debida contención a fin de evitar daños auditivos.



WARRANTY

Luckily for you and for us, Arendal Sound products are extremely durable products which have gone through extreme stress tests during development. However failures may happen and if it does, you will always know we are here to backing you up.

Arendal Sound have up to 10 Years warranty (5 for electronics) which cover all costs for you as a customer within the warranty terms. We are also accepting warranty to follow second hand purchases where sales receipt is proof of purchase which new owner needs to get from original buyer.

All Arendal Sound products can easily be repaired by the customer, by replacing components yourself. This means we may send you the replacement part/module which is needed, instead of sending the complete product back and forth, this saves down time and you will be guided by qualified staff from the Arendal Sound team. We will only ask you to do very simple steps to fix the products and you do not need any servicing experience at all. In the unfortunate event of a product failure, it will usually only take a few days to get the problem fixed.

If you have a problem with your product, please contact **support@arendalsound.com**, send us the serial number of the product that has a problem and we will help you to identify the defective component. If we ship you a replacement part for your product, that you can swap out by yourself, we will send pre-paid return labels to return the defective part to us. This part must be returned or you will be invoiced for the replacement part in full. Every cost is covered by us if the product is under warranty. Should you prefer to send the entire product back to us for service - please contact us at **support@arendalsound.com**.



When sending the product back to us it is important that you use the original packaging or something of similar quality. We are not responsible for damage caused by inadequate packaging but we will be helpful with arranging the return shipment.

Important!

Do not try to repair the product without permission from us. Disassembling or removing parts from your product(s) in one way or another, can damage your product(s) without the right instructions. It will void your warranty rights.

Non-authorized sales

Any sales done outside arendalsound.com (or belonging domains) are non-authorized and will therefore not be under our warranty. Please email us at **sales@arendalsound.com** if you have any questions.



